




Aquarius Universal Premium	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray

AQUARIUS UNIVERSAL PREMIUM 5000 – 12000

Product characteristics at a glance

- Extremely quiet operation
- Easy adjustment of the flow rate
- Integrated thermal protection – from 600 onwards
- Suitable for wet or dry installations
- Energy-efficient thanks to low energy consumption
- Frost protected up to -20°C
- High-quality workmanship with stainless steel
- Priming even at low water levels
- Removable pedestal for installation where space is at a premium

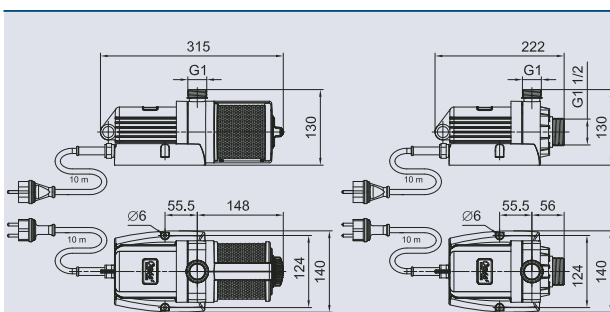


Aquarius Universal Premium 5000/6000



Aquarius Universal Premium 5000

Aquarius Universal Premium 5000 – 12000

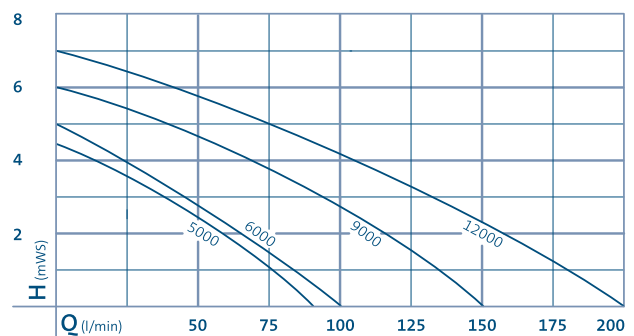

Aquarius Universal Premium	5000	6000	9000	12000
Dimensions (L x W x H) [mm]	315 x 140 x 130		337 x 161 x 158	
Rated voltage [V/Hz]	220–240 V / 50 Hz			
Power consumption [W]	85	110	195	270
Power cable length [m]	10			
Net weight [kg]	3.40	3.50	5.40	5.45
Max. flow rate [l/min]	83	100	150	200
Max. flow rate [l/h]	5000	6000	9000	12000
Max. head height [m]	4.50	5.00	6.00	7.00
Connection, pressure-side [inch]	1		1 ½	
Connection, suction-side [inch]	1 ½			
Connection for hoses [inch]	1, 1 ¼, 1 ½			
Filter intake surface [cm²]	200		223	
Electronic adjustment	Yes			
Order no.	56617	56637	56876	56879