

	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
ProfiSkim 100													
ProfiSkim Premium													

## PROFISKIM 100

Leaves, and particles deposited on the water surface by wind are a risk to the biological equilibrium in a body of water. OASE skimmers powerfully and effectively pull these pollutant particles off of the surface and into the collection basket. Thus pollutants can be removed from the eco system of the body of water before they harm the eco system.

ProfiSkim 100 for water surface cleaning spares you the bothersome task of mechanically cleaning surface pollutants. This stationary skimmer is impressive with an easy-to-operate cleaning unit and generously dimensioned 12-litre collection basket.


### Product characteristics at a glance

- Powerful suction cleaning of pond surfaces up to 65 m<sup>2</sup> or up to 80 m<sup>2</sup>
- Ideal implementation in shallow water zones
- Can be used in gravity fed operation (DN 110) or pump fed operation (incl. 2" adapter)
- Water routing for effective suction capacity
- Perfect supplement for filter systems in the gravity fed, as well as the pump fed system
- Large, easy to clean stainless steel basket with 8 mm mesh width. On request, a debris basket with 2 mm mesh width is available for the ProfiSkim Premium.
- ProfiSkim Premium with stable stainless steel base for even easier installation

\* Limited through DN100 pipe connection



ProfiSkim 100

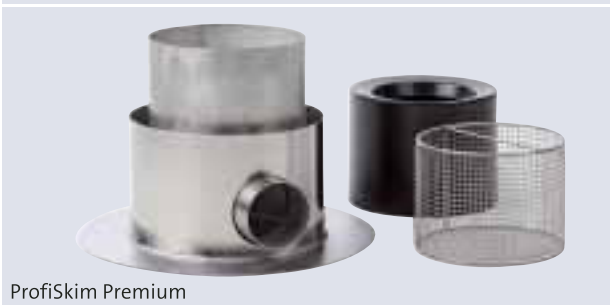

ProfiSkim Premium

ProfiSkim	100	Premium
Pedestal footprint (L x W) [mm]	780 x 585	500 x 340
Height min. [mm]	350	350
Height max. [mm]	530	530
Installation depth max. [mm]	530	530
Connection [DN]	2", DN 110	2", DN 110
Pipe reduction [inch]	2	2
Recommended flow rate (Gravitation)	10000 – 12000	6000 – 12000
Recommended flow rate (pumped)	10000 – 20000	6000 – 20000
Filter basket volume [l]	12.00	7.00
Max. pond surface [m <sup>2</sup> ]	80	65
Weight [kg]	13.06	9.10
<b>Order no.</b>	<b>57134</b>	<b>51185</b>